


PLYMOUTH COUNTY ENTRANCE POLICY


TYPICAL GRAVEL ROAD ENTRANCE

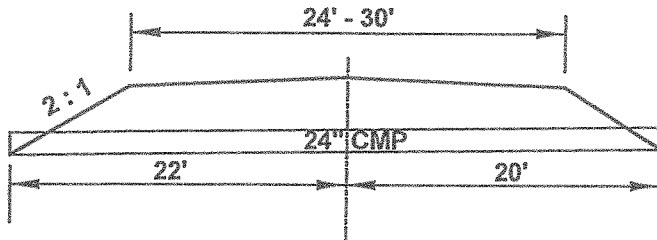

GRAVEL ROAD

FILL HEIGHT	PIPE LENGTH	
	24' WIDTH	30' WIDTH
3 FT.	38 FT.	44 FT.
4 FT.	42 FT.	48 FT.
5 FT.	46 FT.	52 FT.

TYPICAL PAVED ROAD ENTRANCE

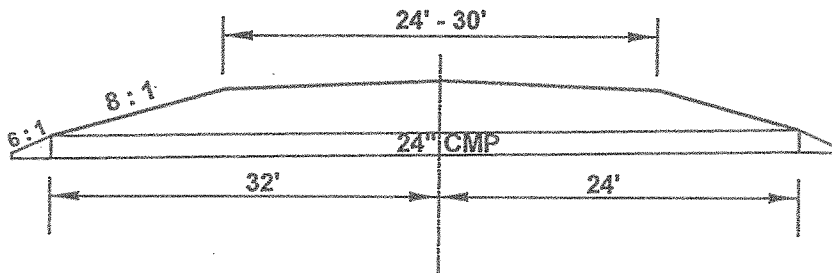

PAVED ROAD

FILL HEIGHT	PIPE LENGTH	
	24' WIDTH	30' WIDTH
3 FT.	40 FT.	46 FT.
4 FT.	56 FT.	62 FT.
5 FT.	72 FT.	78 FT.

ENTRANCE INSTALLATION COSTS

1. GRAVEL ROAD - CULVERT COST PLUS \$500.00
2. PAVED ROAD WITH 66 FT. R.O.W. - CULVERT COST PLUS \$750.00
3. PAVED ROAD WITH 100 FT. MIN. R.O.W. - CULVERT COST PLUS \$1250.00
4. SURFACING COSTS IF NEEDED - MATERIAL COSTS PLUS HAUL - LANDOWNER IS RESPONSIBLE FOR SURFACING COSTS.
5. TIME AND MATERIAL CHARGED FOR OTHER MISC. WORK.
6. DRIVEWAYS BUILT WIDER THAN THE STANDARD WILL BE BUILT ON A TIME AND MATERIALS BASIS.

THE ABOVE COSTS ARE MINIMUM CHARGES IF DIRT FOR THE ENTRANCE IS AVAILABLE AT THE SITE OR CAN BE OBTAINED BY CLEANING DITCHES WITHIN A REASONABLE DISTANCE. IF DIRT HAS TO BE HAULED A CONSIDERABLE DISTANCE OR FROM A STOCKPILE, AN ADDITIONAL CHARGE OF \$50.00 PER LOAD FOR TANDEM AXEL TRUCKS WILL BE ADDED.

NOTE: COST OF CULVERT WILL INCLUDE CULVERT, BANDS, AND IF APPLICABLE, SLOPED END SECTION.

ENTRANCE WIDENING

1. CULVERT COST PLUS \$150.00 FOR CULVERT INSTALL.
2. \$50.00 / LOAD FOR MATERIAL HAULED IN.
3. EQUIPMENT TIME IF MATERIAL IS AVAILABLE AT THE SITE.
4. SURFACING COSTS IF NEEDED - MATERIAL COSTS PLUS HAUL - LANDOWNER IS RESPONSIBLE FOR SURFACING COSTS.

FORESLOPE FLATTENING

CHARGE ON A TIME AND MATERIAL BASIS.